2 CLUSTER BOX UNIT (CBU) CANOPY






1761 McCoba Drive, Suite A, Smyrna, GA 30080 Phone: (770) 431-7300 Fax: (770) 431-7305

This document is property of Mitchell Metals, LLC. Modications to this document are prohibited without prior written consent from Mitchell Metals, LLC.




1761 McCoba Drive, Suite A, Smyrna, GA 30080 Phone: (770) 431-7300 Fax: (770) 431-7305

This document is property of Mitchell Metals, LLC. Modications to this document are prohibited without prior written consent from Mitchell Metals, LLC.

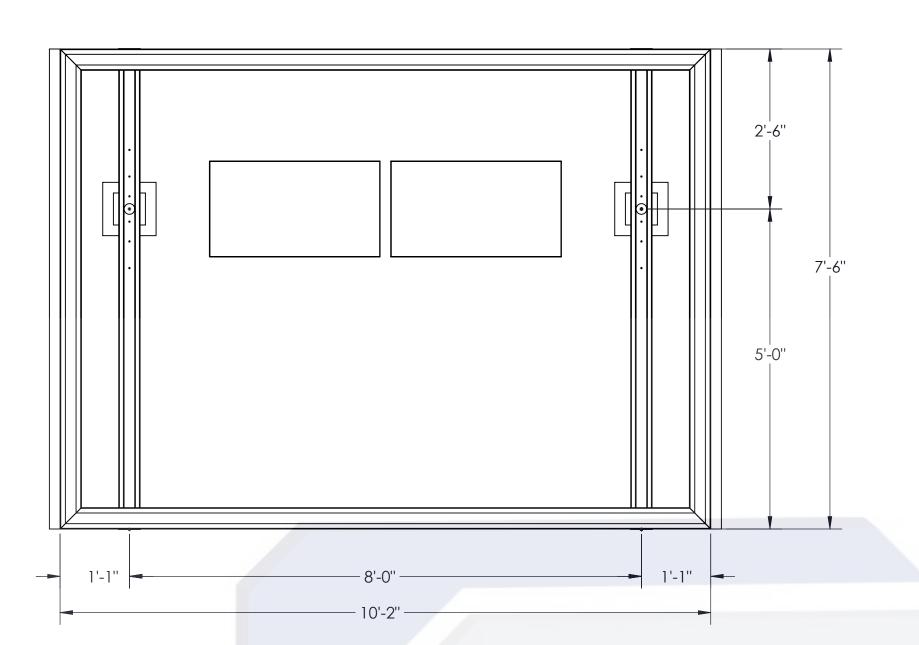

TOP VIEW - NO DECKING FRAMING AND GUTTER LAYOUT

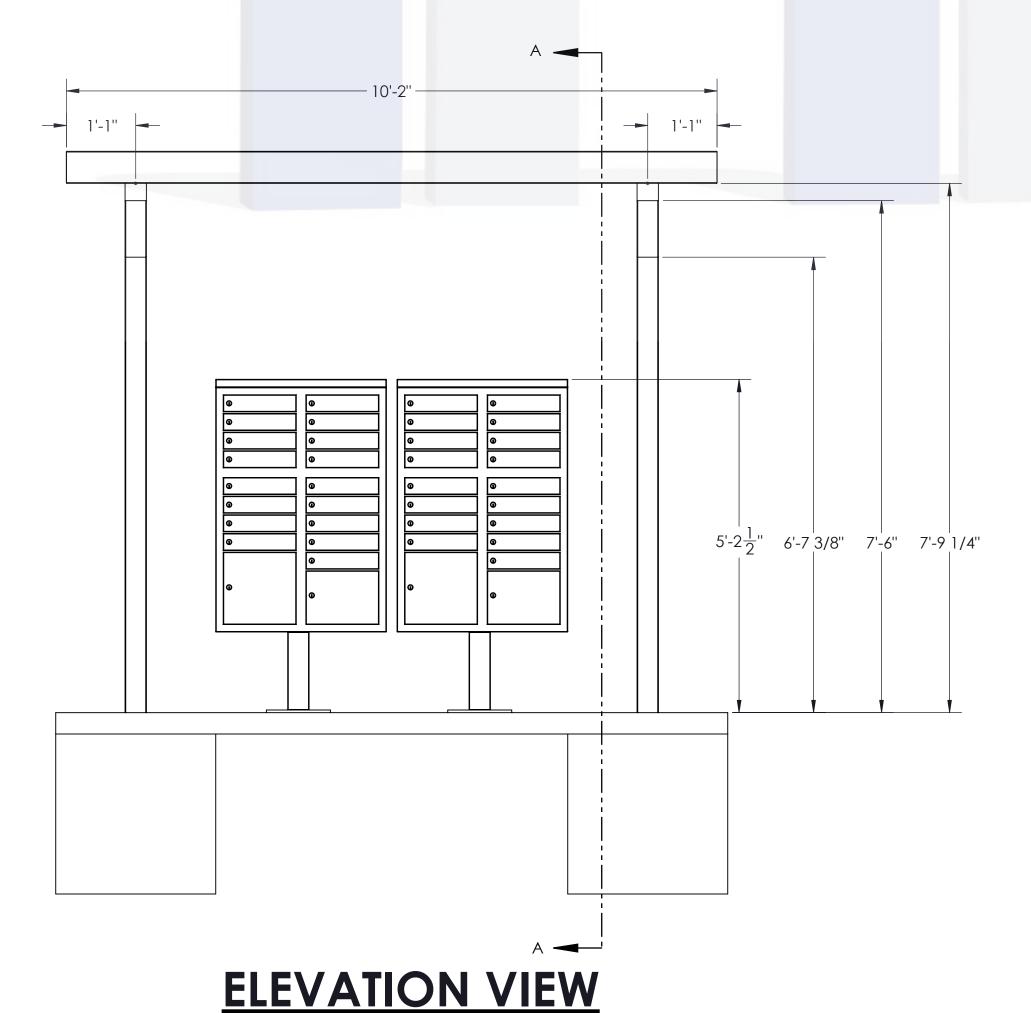

1 6063-T6 Aluminum
2 6063-T6 Aluminum
3 0.080" Aluminum
4 6063-T6 Aluminum
5 Aluminum
6 Deflector Plate
7 CBU Mailbox

ITEM NO.

PART NUMBER

DESCRIPTION

Column (see page 3 for size)


Beam (see page 3 for size)


Welded End Cap

4X6 GUTTER

3 x 12 x 0.032 Roll Formed Flat Pan

Deflector Plate

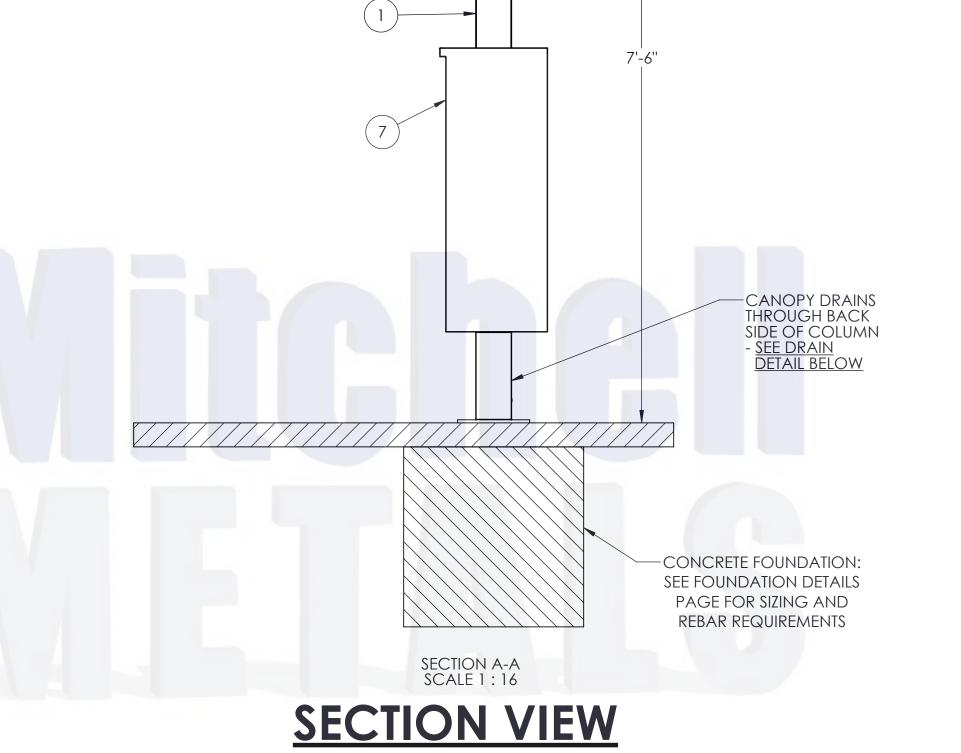

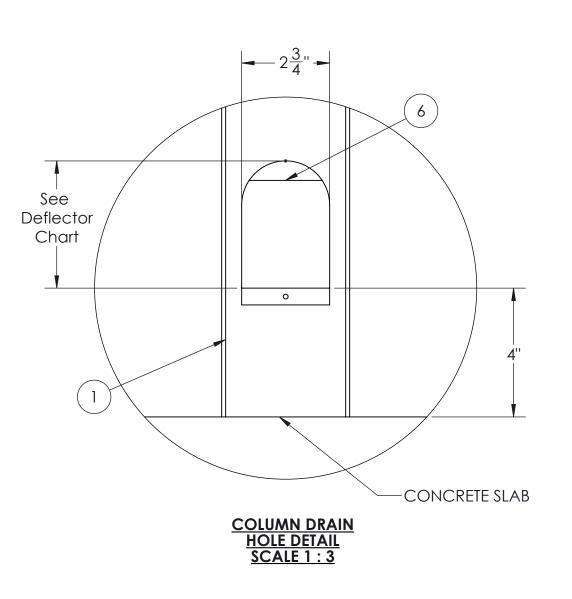

Deflector Plate Cutout Height	Column Size
4''	4"x6"
6"	6"x6"
۲"	۲"\\Q"

STY

2 CLUSTER BOX UNIT (CBU) CANOPY



1761 McCoba Drive, Suite A, Smyrna, GA 30080 Phone: (770) 431-7300 Fax: (770) 431-7305

This document is property of Mitchell Metals, LLC. Modications to this document are prohibited without prior written consent from Mitchell Metals, LLC.


View before Footing and Blockout Installation



Ver antes de instalar la zapata de concreto

GENERAL NOTES:

- Max column height to be 9'-0". Canopy designed at 7'-6" to bottom of beam above finished concrete slab.
- See Foundation Details Page for concrete foundation design based on project location design criteria.
- Minimum footing size is based on 1500 PSF soil condtion.
- Adhere to all local building codes, including layout, foundation design and depth (i.e. frost line depth)
 Canopy designs comply with USPS Developers and Builders Guide.
- Any canopy lighting required is provided by others and may require additional canopy framing to support.
- Reference 2010 ADA Standards for Accessible Design for concrete pad design.
- Reference Mitchell Metals CBU Canopy Cover Specifications Section 105500 Postal Specialties
- DESIGN CRITERIA: IBC 2018, ASCE 7-16, ADM 2015, Exposure Category = B, Risk Category = II, Live Load = 20 psf
 Wind = 115mph (max), Ground Snow Load = 30psf (max) 4"x6"x0.150" Columns, 4"x6"x0.125" Beams
- Wind = 140mph (max), Ground Snow Load = 5psf (max) 6"x6"x0.150" Columns, 6"x6"x0.130" Beams
- Wind = 170mph (max), Ground Snow Load = 5psf (max) 6"x8"x0.188" Columns, 6"x6"x0.130" Beams.

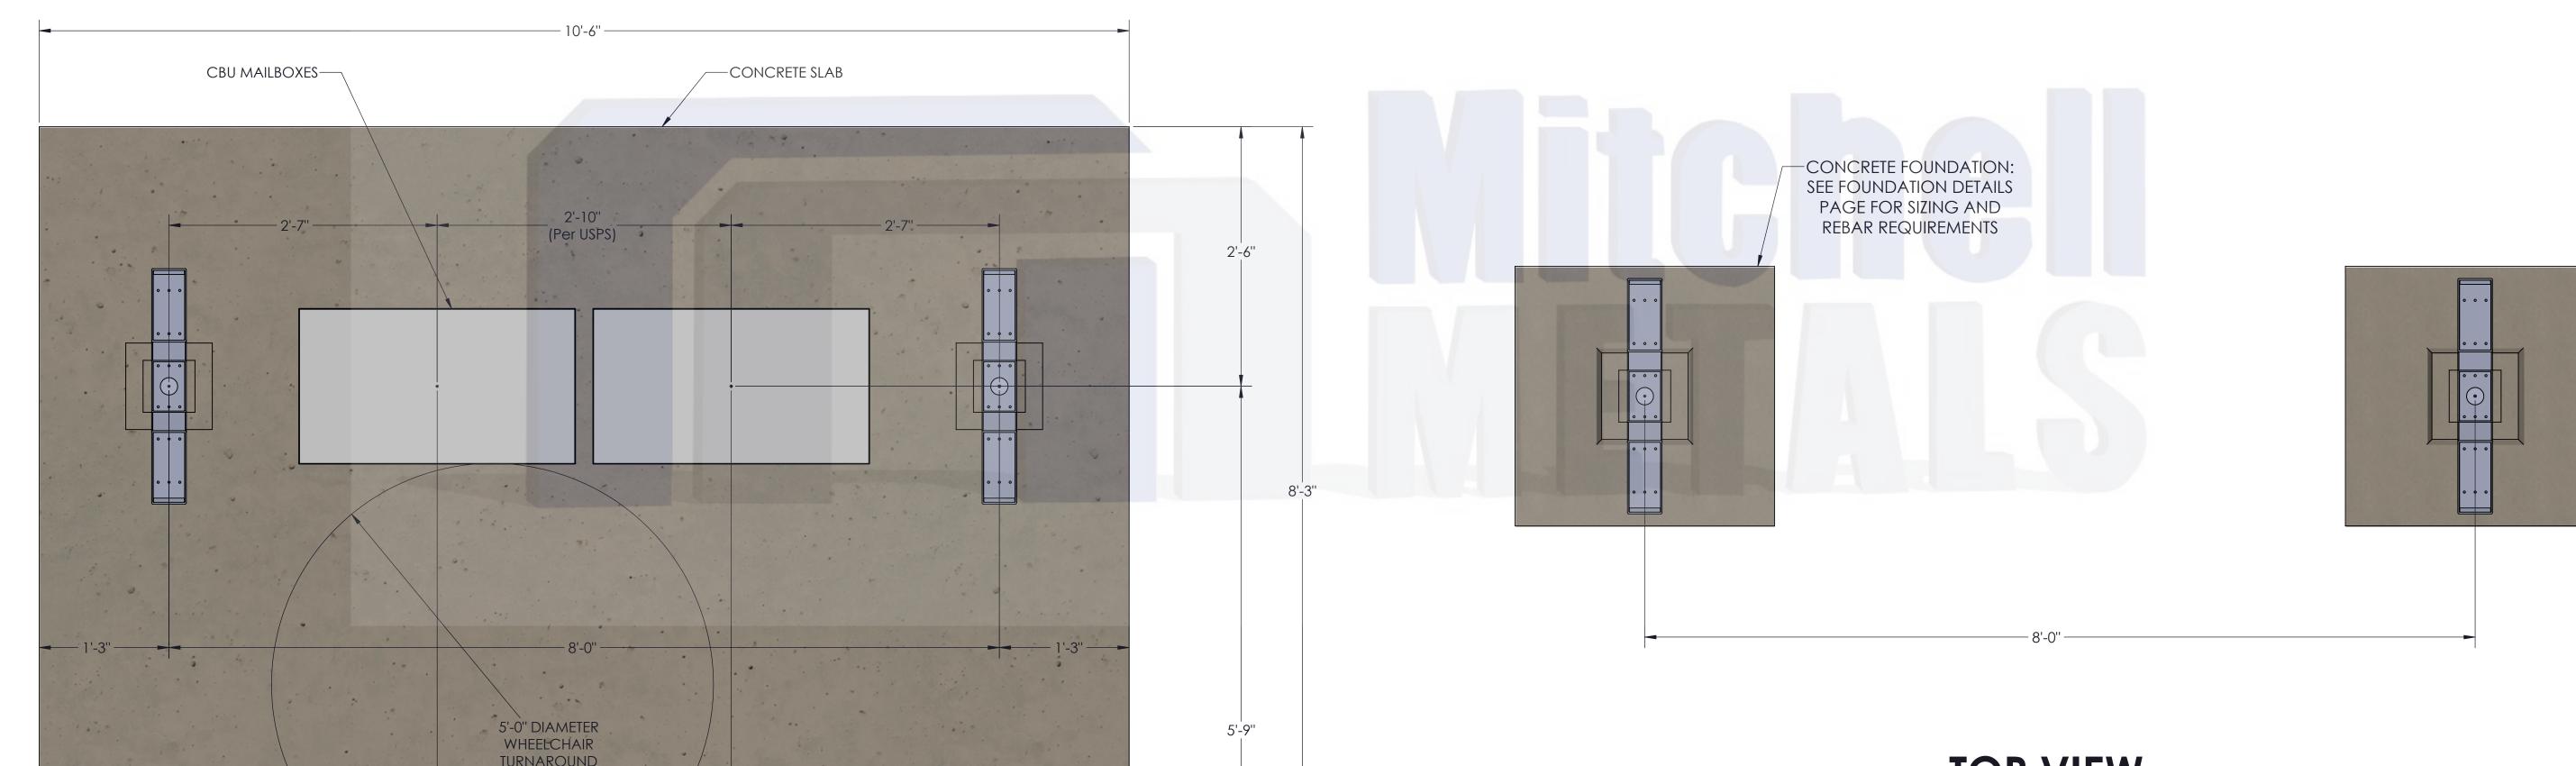

TOP VIEW

COLUMN/MAILBOX/CONCRETE LAYOUT

TOP VIEW
FOOTING LAYOUT

STYLE:

