
## 30 BACK TO BACK CBU CANOPY






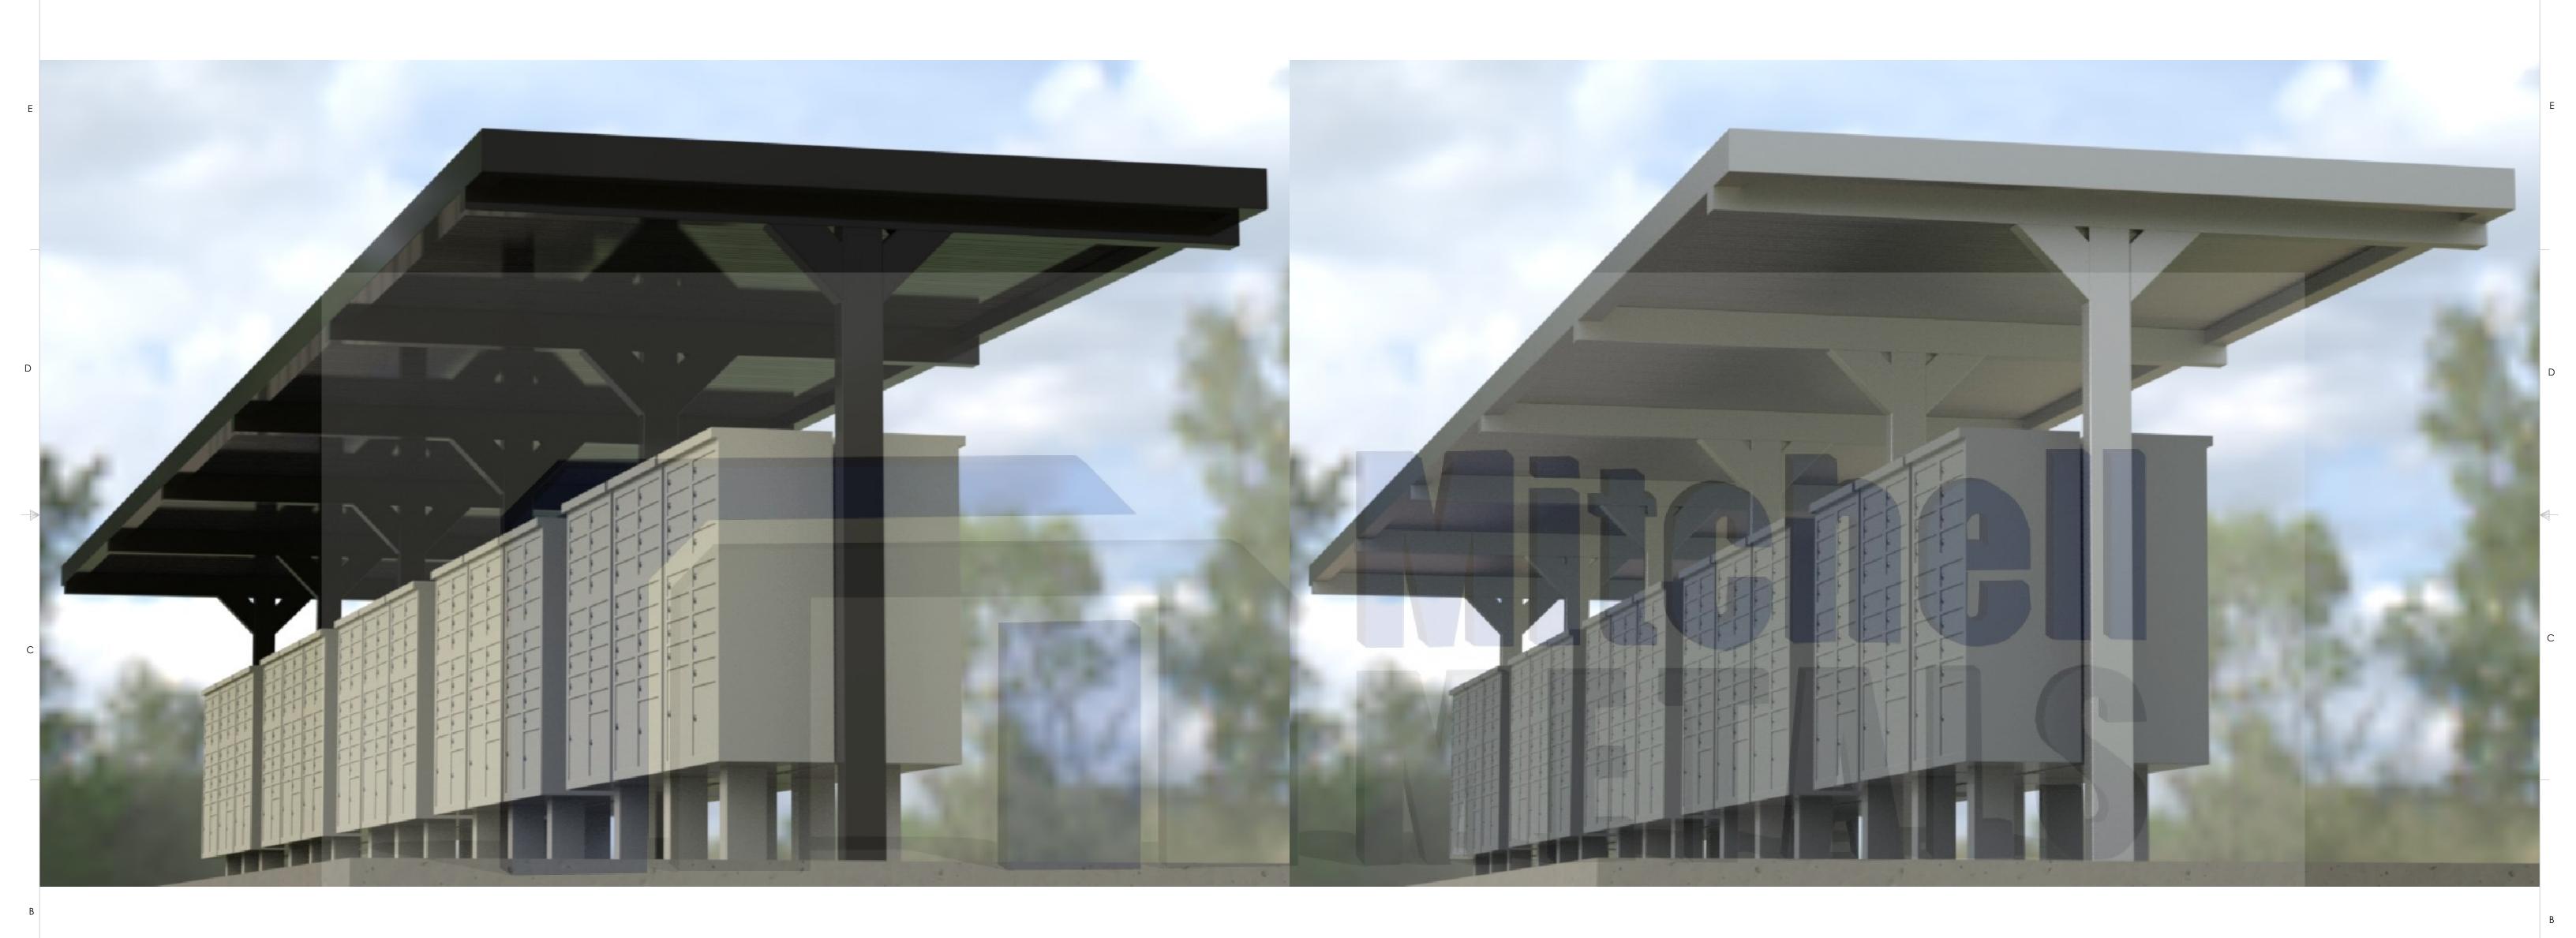

ITEM NO. PART NUMBER 1761 McCoba Drive, Suite A, Smyrna, GA 30080 Phone: (770) 431-7300 Fax: (770) 431-7305 6063-T6 Aluminum 6063-T6 Aluminum 0.080" Aluminum 6063-T6 Aluminum

This document is property of Mitchell Metals, LLC. Modications to this document are prohibited without prior written consent from Mitchell Metals, LLC.

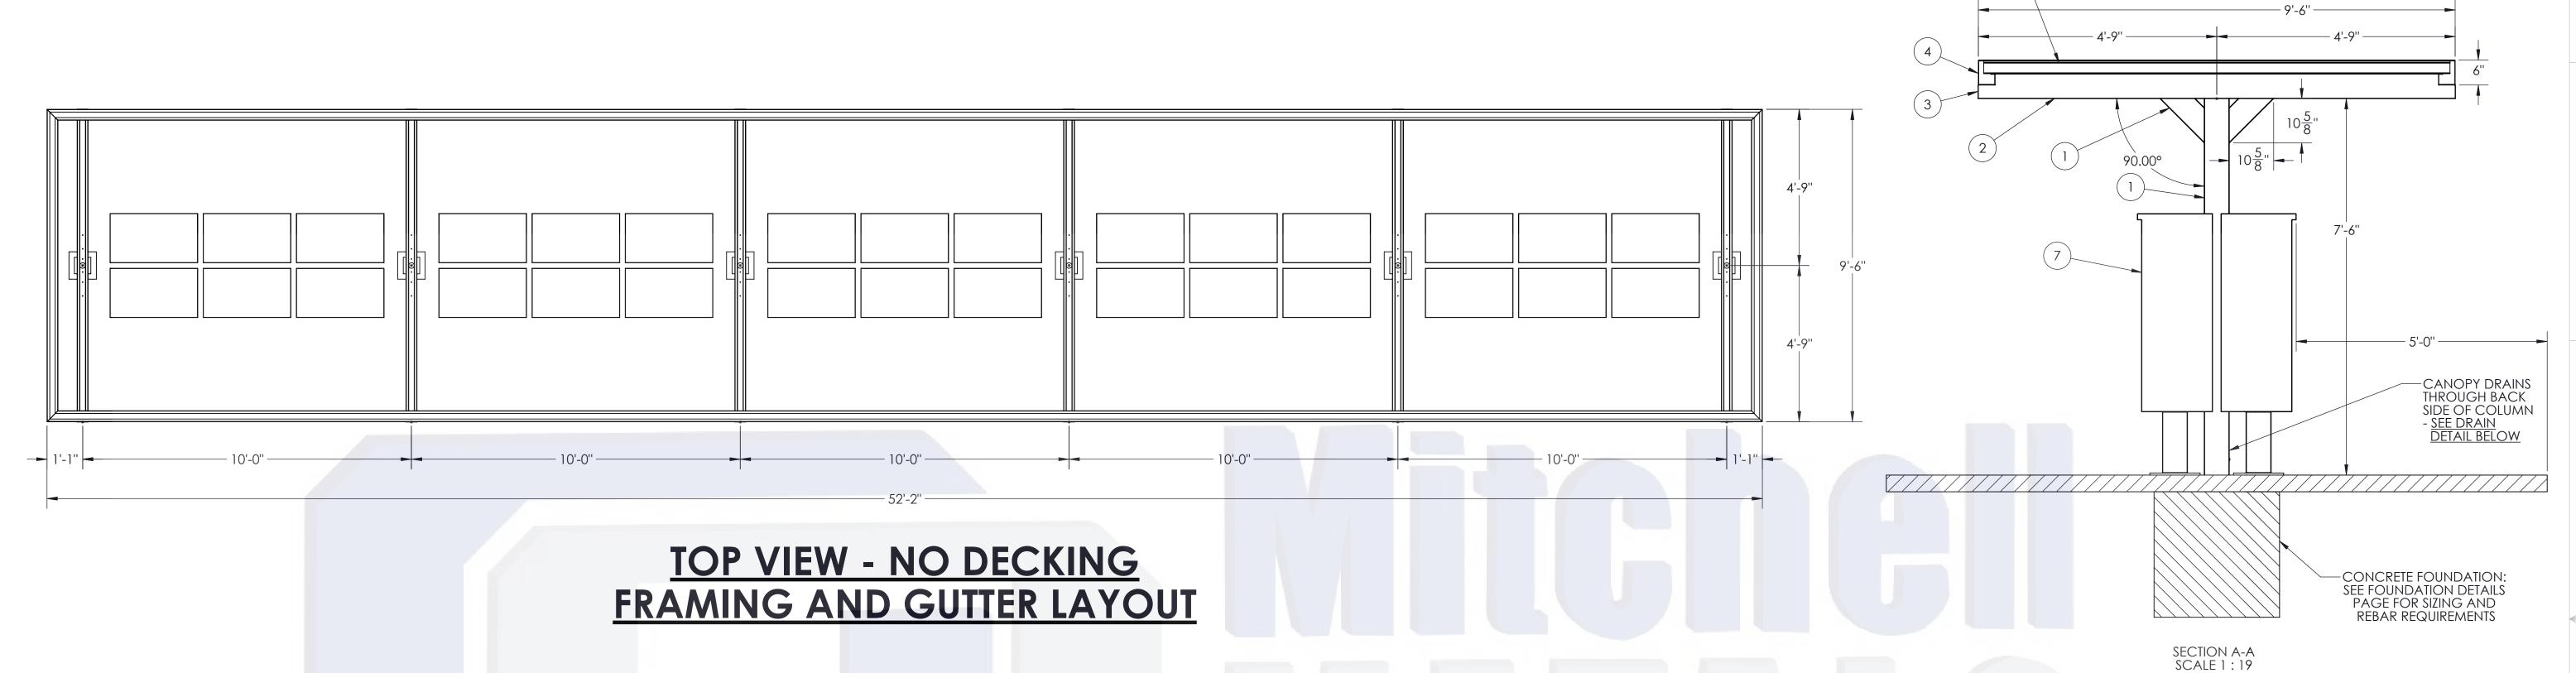



**DESCRIPTION** 

Column (see page 3 for size)

Beam (see page 3 for size) Welded End Cap

4X6 GUTTER


3 x 12 x 0.032 Roll Formed Flat Pan

Deflector Plate

Aluminum

Deflector Plate

CBU Mailbox

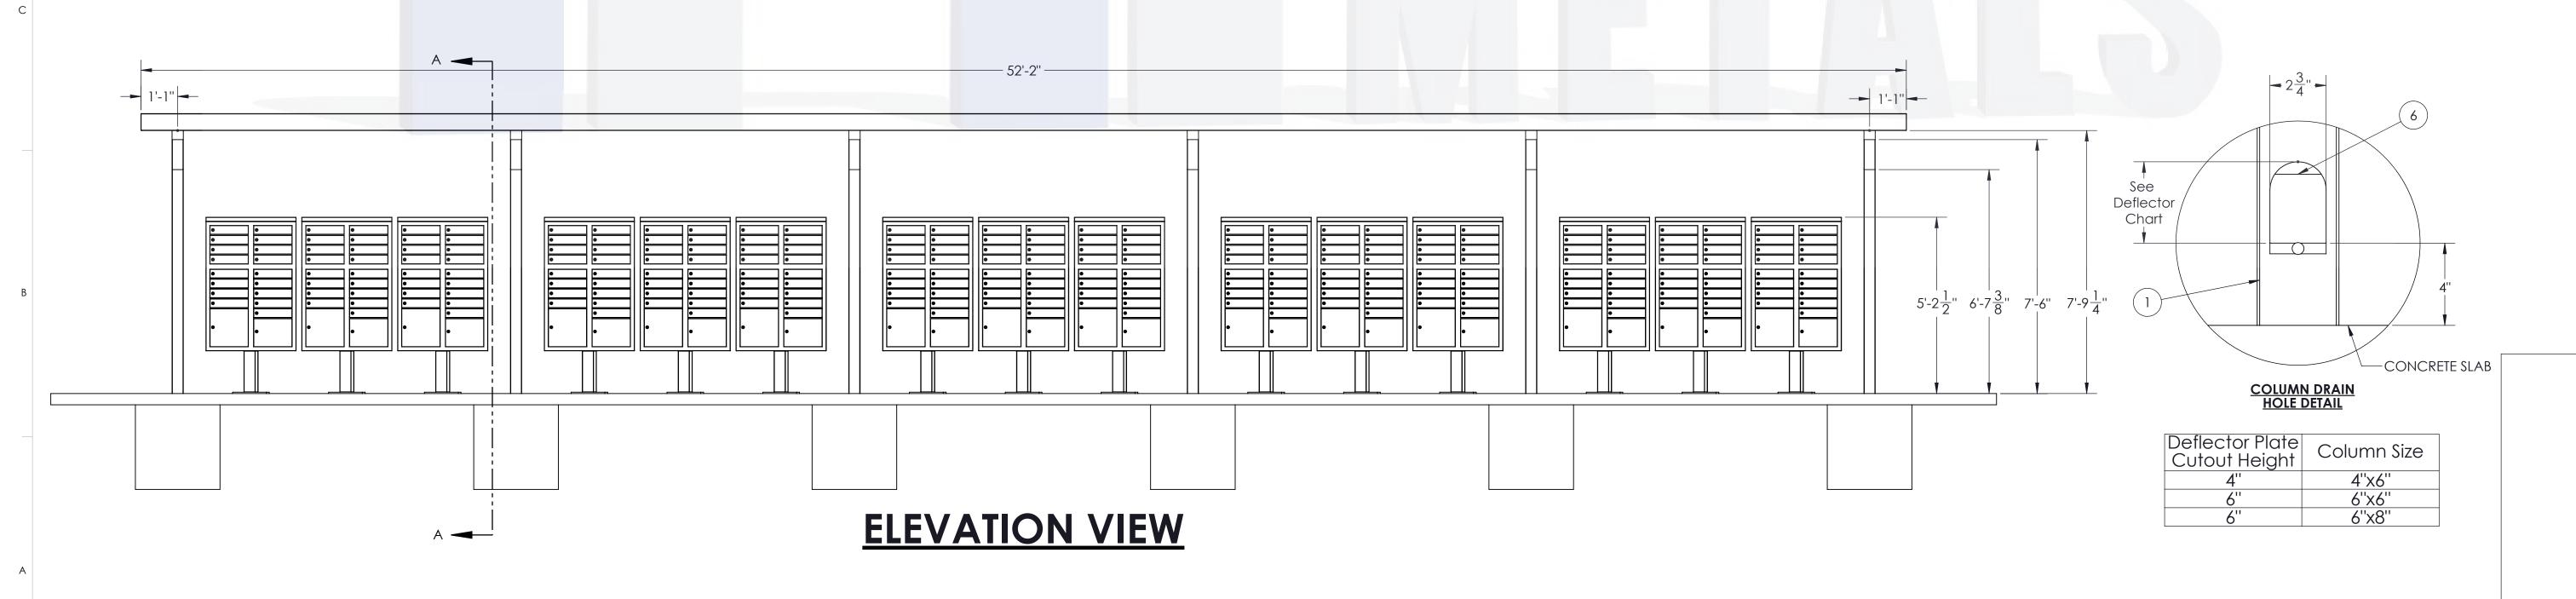

BACK TO BACK 30 CBU CANOPY




1761 McCoba Drive, Suite A, Smyrna, GA 30080 Phone: (770) 431-7300 Fax: (770) 431-7305


This document is property of Mitchell Metals, LLC. Modications to this document are prohibited without prior written consent from Mitchell Metals, LLC.

## **GENERAL NOTES:**

- Max column height to be 9'-0". Canopy designed at 7'-6" to bottom of beam above finished concrete slab.
- See Foundation Details Page for concrete foundation design based on project location design criteria.
- Minimum footing size is based on 1500 PSF soil condtion.
- Adhere to all local building codes, including layout, foundation design and depth (i.e. frost line depth) Canopy designs comply with USPS Developers and Builders Guide.
- Any canopy lighting required is provided by others and may require additional canopy framing to support.
- Reference 2010 ADA Standards for Accessible Design for concrete pad design.
- Reference Mitchell Metals CBU Canopy Cover Specifications Section 105500 Postal Specialties
- DESIGN CRITERIA: IBC 2018, ASCE 7-16, ADM 2015, Exposure Category = B, Risk Category = II, Live Load = 20 psf • Wind = 115mph (max), Ground Snow Load = 30psf (max) - 4"x6"x0.150" Columns, 4"x6"x0.125" Beams
- Wind = 140mph (max), Ground Snow Load = 5psf (max) 6"x6"x0.150" Columns, 6"x6"x0.130" Beams
- Wind = 170mph (max), Ground Snow Load = 5psf (max) 6"x8"x0.188" Columns, 6"x6"x0.130" Beams.

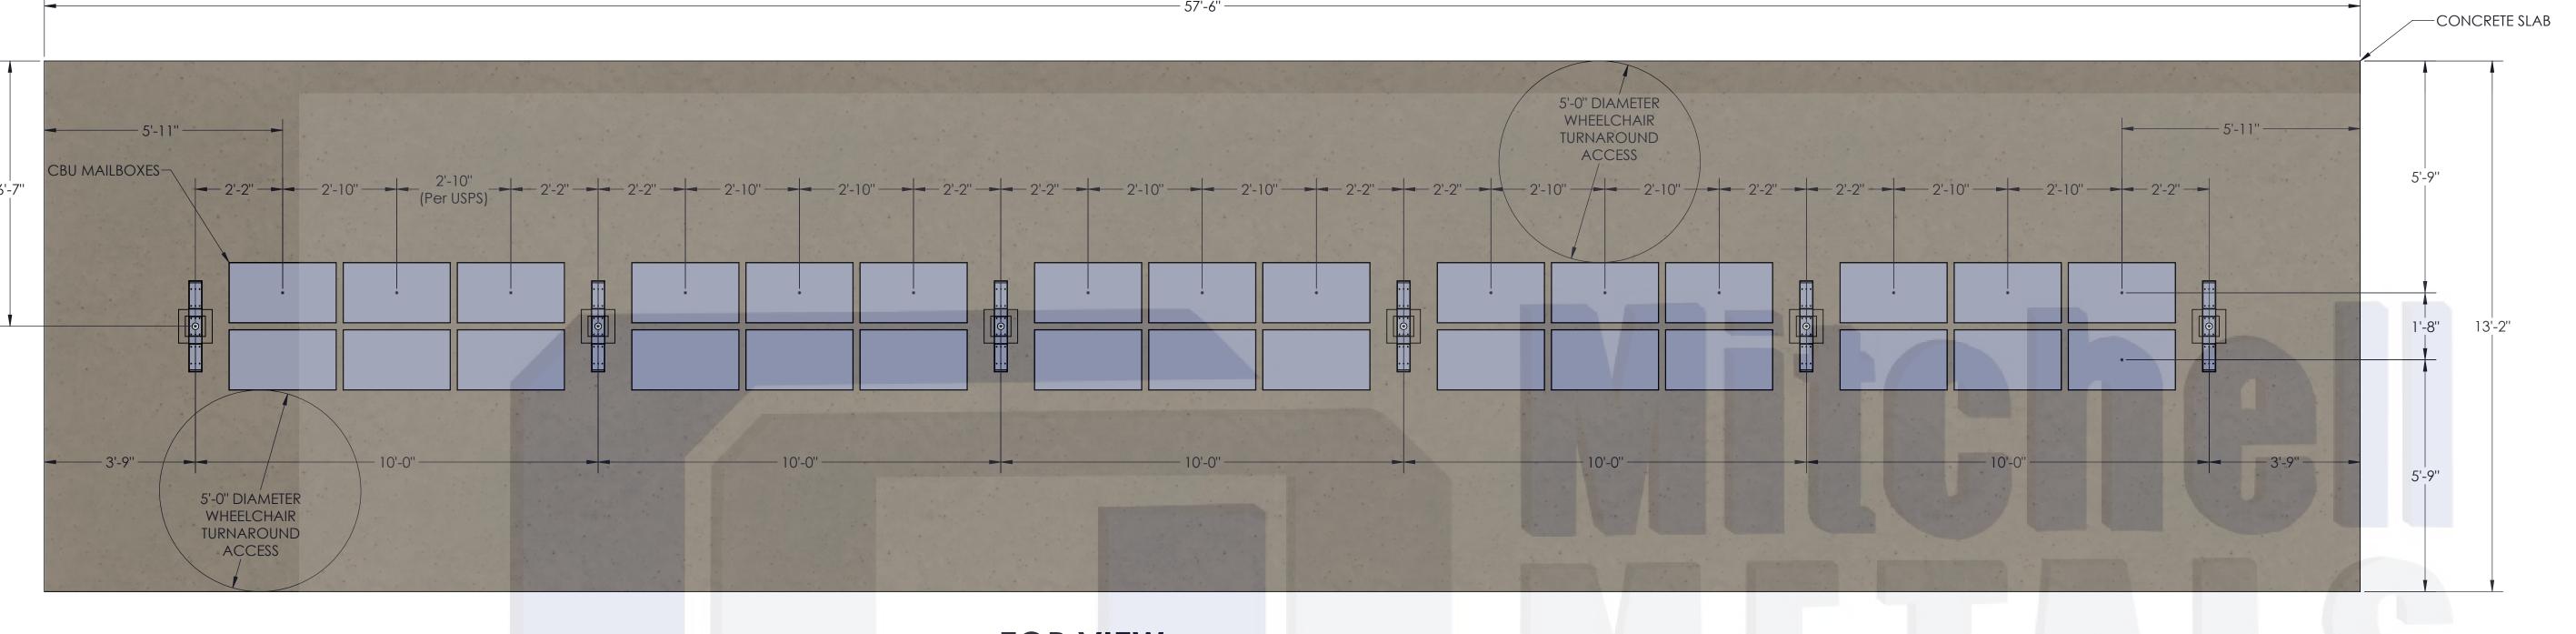

## **TOP VIEW** COLUMN/MAILBOX/CONCRETE LAYOUT

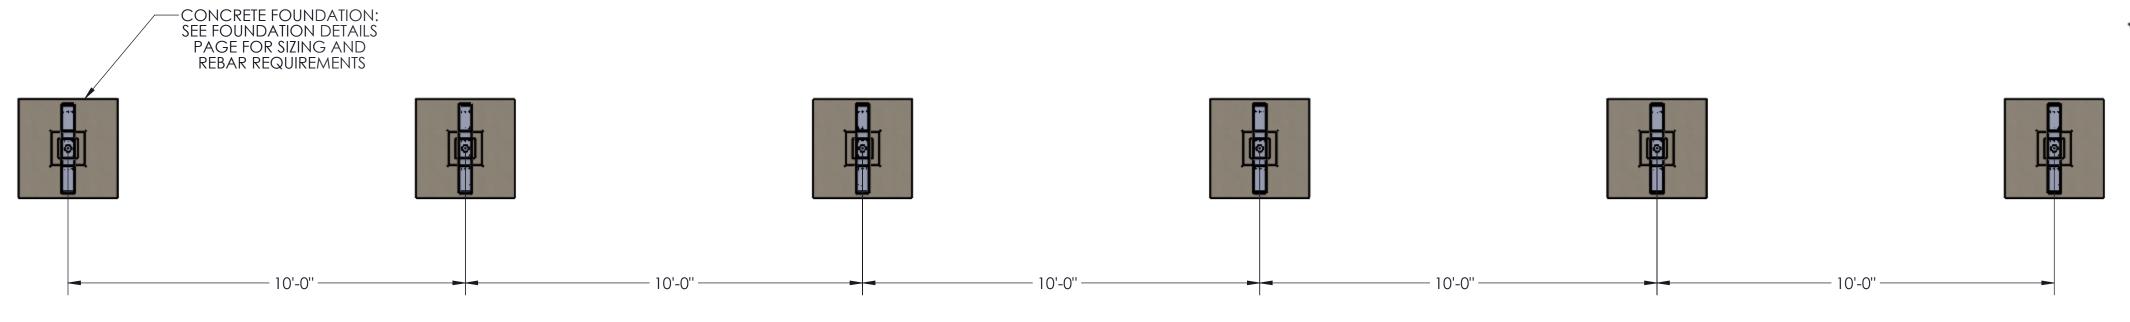

View before Footing and Blockout Installation



Ver antes de instalar la zapata de concreto

**TOP VIEW LAYOUT FOOTING & BLOCKOUT** 

BACK TO BACK 30 CBU CANOPY

